

Guangzhou Netech Environmental Technology Co., Ltd



Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Fax: (8620) +32032106

Contact person: Wendy He

Cell /Whatsapp: +86 13826080743

Email: sales04@gznetech.com

Service-Mail: service@gznetech.com

Skype: netech008

Ail-Web: <http://netech21v.en.alibaba.com/>

Service-Tel: +8613352827882

Com-Web: <http://www.ozonegeneratorsupplier.com/>

Portable Ozone Generators

Catalogue Content:

1. Output 100mg/hr mini ozone& ion generator model **NT-100mg**
2. Output 3g-5g/hr ozone generator model **NT-KTB and KTA**
3. Output 3g-7g/hr ozone generator model **NT-BT**
4. Output 3g-6g/hr ozone generator model **NT-BS**
5. Output 3g-7g/hr High ozone concentration model **NT-BP**
6. Output 3g-7g/hr Desktop high ozone concentration model **NT-ZTW**



NOA CERTIFICATION
QUALITY MANAGEMENT SYSTEM CERTIFICATE

This is to certify that the QUALITY MANAGEMENT SYSTEM of
GUANGZHOU CHUANGHUAN OZONE ELECTRIC APPLIANCE CO.,LTD.
 Registered Address: Room 210A, No.18 Mubei West Street, Tianhe Distrit, Guangzhou, Guangdong, China
 Business Address: Room 210A, No.18 Mubei West Street, Tianhe Distrit, Guangzhou, Guangdong, China
 has been assessed by NOA Certification and found to comply with
GB/T19001-2008 idt ISO9001:2008
 for the
 Design, manufacture and sales of electrical equipment for environmental protection(ozone-making equipment and oxygen-making equipment)

Certificate No. NOA150002
 Organization Code: 79500004
 Date of Issue/Reissue: 11 February 2015
 Certificate Expiry: 30 January 2018

ANAB ACCREDITED
IAF ACCREDITED

Initial Certification: 11 February 2015 Recertification Date: 30 January 2018
 This certificate is issued by Shanghai Netech & Certification Co., Ltd. Its validity is subject to the condition that the certificate holder shall comply with the requirements set out by ISO 9001 and the certificate shall be subject to NOA pre- and post- audit. For obtaining the validity of certificate, please write your name and company name on the certificate information in the website of the NOA official website: <http://www.noa.org.cn>

NOA Certification Service
 Room C55, 14 Floor, No.138, Puting Avenue, Shanghai, China Email: road@noa.org.cn

CERTIFICATE

Anbotek
Product Safety

CERTIFICATE
 Of Conformity
 Low Voltage Directive 2006/95/EC
 Registration No.: AT011407127S
 Report No.: R011407127S

Applicant : Guangzhou Netech Environmental Technology CO., Ltd
 Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou City, China

Product : Ozone Generator

Identification : Model No. : CH-BP
 Trade Mark : Ozocenter
 Rating : 100-240V~, 50/60Hz, 100-150W, Class I

Test Standards : EN 62233-2008
 EN 60335-2-405:2003+A1:2009+A11:2012
 EN 60335-1:2012

The certificate of conformity is based on an evaluation of a sample of the above mentioned product. Technical report and documentation are at the applicant's disposal. This is to certify that the tested sample is in conformity with all provisions of Annex II of Council Directive 2006/95/EC, in its latest amended version, referred to the Low Voltage Directive. The certificate does not imply assessment of the series production of the product and does not permit the use of Lab's logo. The applicant of the certificate is authorized to use this certificate in connection with EC declaration of conformity to Annex II of the Directive.

Certified by
 Jeff Zhu
 Manager
 Jun 19, 2014
 Date

CE The CE Marking may only be used if all relevant and effective EC Directives are complied with **CE**

Shenzhen Anbotek Compliance Laboratory Limited
 1/F, Building 1, SEC Industrial Park, No.0409 Daxue Road, Nanshan District, Shenzhen, Guangdong, China
<http://www.anbotek.com> Tel: (86)755-2606544
 Fax: (86)755-26014772 Email: apoc@anbotek.com

CERTIFICATE

Anbotek
Product Safety

CERTIFICATE
 Of Conformity
 EC Council Directive 2004/108/EC
 Electromagnetic Compatibility
 Registration No.: AT011406507E
 Report No.: R011406507E

Applicant : Guangzhou Netech Environmental Technology CO., Ltd
 Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou City, China

Product : Ozone Generator

Identification : Model No. : CH-KTB, CH-BT
 Trade Mark : OZOCENTER
 Rating : 220-240V~, 50/60Hz, 60W, Class I

Test Standards : EN 55014-1:2006+A1:2009+A2:2011
 EN 61000-3-2:2006+A1:2009+A2:2009
 EN 61000-3-3:2013
 EN 55014-2:1997+A1:2001+A2:2008

The certificate of conformity is based on an evaluation of a sample of the above-mentioned product. Technical report and documentation are at the applicant's disposal. This is to certify that the tested sample is in conformity with all provisions of Annex II of Council Directive 2004/108/EC, in its latest amended version, referred to EMC Directive. The certificate does not imply assessment of the production and does not permit the use of Lab's logo. The applicant of the certificate is authorized to use this certificate in connection with EC declaration of conformity to Article 15.1 of the Directive.

Certified by
 Tom Chen
 Manager
 Jun 30, 2014
 Date

CE The CE Marking may only be used if all relevant and effective EC Directives are complied with **CE**

Shenzhen Anbotek Compliance Laboratory Limited
 1/F, Building 1, SEC Industrial Park, No.0409 Daxue Road, Nanshan District, Shenzhen, Guangdong, China
<http://www.anbotek.com> Tel: (86)755-2606544
 Fax: (86)755-26014772 Email: se@anbotek.com



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Fax: (8620) +32032106

Contact person: Wendy He

Cell /Whatsapp: +86 13826080743

Email: sales04@gznetech.com

Service-Mail: service@gznetech.com

Skype: netech008

Ail-Web: <http://netech21v.en.alibaba.com/>

Service-Tel:+8613352827882

Com-Web: <http://www.ozonegeneratorsupplier.com/>

NT-KTB Portable Ozone Generator



Applications:

Air purifier, Ozone purifier, Ozone air sterilizer, Restaurant air sterilizer, Hotel room purifier, KTV smell remover

Sterilize and remove odor for farming, Keep fresh, wash and remove the residual pesticides for vegetable and fruits, Ozone generator for removing Formaldehyde, Refrigerator keep fresh equipment.

Purify for air conditioner room, Sterilize for kids clothes and toy, Sterilize for daily necessities, Home water purification, Remove chlorine and oxidation for heavy metals

Functions:

Sterilization: Can quickly kill all bacteria, viruses, but without secondary pollution.

Detoxication: effective remove of pesticide residues from food.

Remove odor: musty, smoke, smoke flavor, water stains etc.

Improve oxygen: improve oxygen for water or air.

Healthy: air purify, expedite human metabolism.

Features:

- Domestic Patent
- CE certification
- Ozone adjustable range: 20%-100%
- Two function for timer: 0-30mins or working continuously
- Changeable plug for different country
- Easy to operate, fashion design, portable

Specifications

Item	Gas flow rate	Power	Output gas tube	Fuse	Size	NW
Model	LPM	W	mm	A	mm	Kg
NT-KTB3G	10	80	φ6	3	320×160×275	4.6
NT-KTB5G		90				

Noted:

1. Above ozone capacity were tested under oxygen source
2. Net weight will be 10% different for different plug.



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Contact person: Wendy He

Email: sales04@gznetech.com

Skype: netech008

Service-Tel: +8613352827882

Fax: (8620) +32032106

Cell /Whatsapp: +86 13826080743

Service-Mail: service@gznetech.com

Ali-Web: <http://netech21v.en.alibaba.com/>

Com-Web: <http://www.ozonegeneratorsupplier.com/>

NT-KTA Portable Ozone Generator



Applications:

Air purifier, Ozone purifier, Ozone air sterilizer, Restaurant air sterilizer, Hotel room purifier, KTV smell remover

Sterilize and remove odor for farming, Keep fresh, wash and remove the residual pesticides for vegetable and fruits, Ozone generator for removing Formaldehyde, Refrigerator keep fresh equipment.

Purify for air conditioner room, Sterilize for kids clothes and toy, Sterilize for daily necessities, Home water purification, Remove chlorine and oxidation for heavy metals

Functions:

Sterilization: Can quickly kill all bacteria, viruses, but without secondary pollution.

Detoxication: effective remove of pesticide residues from food.

Remove odor: musty, smoke, smoke flavor, water stains etc.

Improve oxygen: improve oxygen for water or air.

Healthy: air purify, expedite human metabolism.

Features:

- Domestic Patent
- Ozone adjustable range: 20%-100%
- Two function for timer: 0-30mins or working continuously
- Changeable plug for different country
- Easy to operate, fashion design, portable

Specifications

Item	Gas flow rate	Power	Output gas tube	Fuse	Size	NW
Model	LPM	W	mm	A	mm	Kg
NT-KTA3G	10	80	φ6	3	320×175×265	5.6
NT-KTA5G		90				

Noted:

1. Above ozone capacity were tested under oxygen source
2. Net weight will be 10% different for different plug.



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Fax: (8620) +32032106

Contact person: Wendy He

Cell /Whatsapp: +86 13826080743

Email: sales04@gznetech.com

Service-Mail: service@gznetech.com

Skype: netech008

Ail-Web: <http://netech21v.en.alibaba.com/>

Service-Tel:+8613352827882

Com-Web: <http://www.ozonegeneratorsupplier.com/>

NT-BS Portable Ozone Generator



Applications:

Air purifier, Ozone purifier, Ozone air sterilizer, Restaurant air sterilizer, Hotel room purifier, KTV smell remover

Sterilize and remove odor for farming, Keep fresh, wash and remove the residual pesticides for vegetable and fruits, Ozone generator for removing Formaldehyde, Refrigerator keep fresh equipment.

Purify for air conditioner room, Sterilize for kids clothes and toy, Sterilize for daily necessities, Home water purification, Remove chlorine and oxidation for heavy metals

Functions:

Sterilization: Can quickly kill all bacteria, viruses, but without secondary pollution.

Detoxication: effective remove of pesticide residues from food.

Remove odor: musty, smoke, smoke flavor, water stains etc.

Improve oxygen: improve oxygen for water or air.

Healthy: air purify, expedite human metabolism.

Features:

- Domestic Patent
- Ozone adjustable range: 20%-100%
- Two function for timer: 0-30mins or working continuously
- Changeable plug for different country
- Easy to operate, fashion design, portable

Specifications

Item	Gas flow rate	Power	Output gas tube	Fuse	Size	NW
Model	LPM	W	mm	A	mm	Kg
NT-BS3G	10	80	φ6	3	370×160×295	5.6
NT-BS5G		90				
NT-BS6G		110				

·Noted:

1. Above ozone capacity were tested under oxygen source
2. Net weight will be 10% different for different plug.



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Fax: (8620) +32032106

Contact person: Wendy He

Cell /Whatsapp: +86 13826080743

Email: sales04@gznetech.com

Service-Mail: service@gznetech.com

Skype: netech008

Ail-Web: <http://netech21v.en.alibaba.com/>

Service-Tel:+8613352827882

Com-Web: <http://www.ozonegeneratorsupplier.com/>

NT-BT Portable Ozone Generator



Applications:

Air purifier, Ozone purifier, Ozone air sterilizer, Restaurant air sterilizer, Hotel room purifier, KTV smell remover.

Sterilize and remove odor for farming, Keep fresh, wash and remove the residual pesticides for vegetable and fruits, Ozone generator for removing Formaldehyde, Refrigerator keep fresh equipment.

Purify for air conditioner room, Sterilize for kids clothes and toy, Sterilize for daily necessities, Home water purification, Remove chlorine and oxidation for heavy metals

Functions:

Sterilization: Can quickly kill all bacteria, viruses, but without secondary pollution.

Detoxication: effective remove of pesticide residues from food.

Remove odor: musty, smoke, smoke flavor, water stains etc.

Improve oxygen: improve oxygen for water or air.

Healthy: air purify, expedite human metabolism.

Features:

- Domestic Patent
- CE certification
- Ozone adjustable range: 20%-100%
- Two function for timer: 0-30mins or working continuously
- Changeable plug for different country
- Easy to operate, fashion design, portable

Specifications

Item	Gas flow rate	Power	Output gas tube	Fuse	Size	NW
Model	LPM	W	mm	A	mm	Kg
NT-BT3G	10	80	φ6	3	365×165×275	5.6
NT-BT5G		90				
NT-BT6G		110				
NT-BT7G		120				6

Noted:

1. Above ozone capacity were tested under oxygen source
2. Net weight will be 10% different for different plug.



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Fax: (8620) +32032106

Contact person: Wendy He

Cell /Whatsapp: +86 13826080743

Email: sales04@gznetech.com

Service-Mail: service@gznetech.com

Skype: netech008

Ail-Web: <http://netech21v.en.alibaba.com/>

Service-Tel:+8613352827882

Com-Web: <http://www.ozonegeneratorsupplier.com/>

NT-BP Portable Ozone Generator



Applications:

Air purifier, Ozone purifier, Ozone air sterilizer, Restaurant air sterilizer, Hotel room purifier, KTV smell remover

Sterilize and remove odor for farming, Keep fresh, wash and remove the residual pesticides for vegetable and fruits, Ozone generator for removing Formaldehyde, Refrigerator keep fresh equipment.

Purify for air conditioner room, Sterilize for kids clothes and toy, Sterilize for daily necessities, Home water purification, Remove chlorine and oxidation for heavy metals

Functions:

Sterilization: Can quickly kill all bacteria, viruses, but without secondary pollution.

Detoxication: effective remove of pesticide residues from food.

Remove odor: musty, smoke, smoke flavor, water stains etc.

Improve oxygen: improve oxygen for water or air.

Healthy: air purify, expedite human metabolism.

Features:

- Domestic Patent
- Ozone adjustable range: 20%-100%
- Two function for timer: 0-30mins or working continuously
- Assembled with air pump switch, it can connected with outside oxygen feed
- Changeable plug for different country
- Easy to operate, fashion design, portable

Specifications

Item	Gas flow rate	Power	Output gas tube	Fuse	Size	NW
Model	LPM	W	mm	A	mm	Kg
NT-BP3G	45	110	φ6	3	390×230×310	8.5
NT-BP5G		120				8.6
NT-BP6G		140				8.7
NT-BP7G		150				8.8

·Noted:

1. Above ozone capacity were tested under oxygen source
2. Net weight will be 10% different for different plug.



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Fax: (8620) +32032106

Contact person: Wendy He

Cell /Whatsapp: +86 13826080743

Email: sales04@gznetech.com

Service-Mail: service@gznetech.com

Skype: netech008

Ail-Web: <http://netech21v.en.alibaba.com/>

Service-Tel:+8613352827882

Com-Web: <http://www.ozonegeneratorsupplier.com/>

Desktop Lab Ozone Generator



Applications:

Laboratory: Chemical oxidation for raw material of flavors and fragrances, small water treatment experiment

Pharmaceutical industry: Water, air conditioner, workshop, dressing room, sterile room etc

Medical: Ward, operating room, medical devices, sterile room etc

Features:

1. Corona Discharge technology
2. Built in Domestic Patent-Ceramic ozone tube with electric board
3. Feed outside oxygen source only with high ozone concentration
4. Ozone adjustable range: 20%-100%
5. Digital Timer : one or two recycle working time
6. Stylish, small size, plug& play
7. Changeable plug for different country.
8. Output : 3G/Hr, 5G/Hr, 6G/Hr, 7G/Hr.
9. Suitable used for the line which required high ozone concentration

Control panel:

Flow meter, Ozone adjuster, Oxygen input, Ozone output, Ammeter, Switch, Timer, Working light, Power light

Specifications:

Item	Oxygen flow rate	Power	Output gas tube	Fuse	Size	NW
Model	LPM	W	mm	A	mm	Kg
NT-ZTW 3G	1	80	φ6	3	400×370×150	8.2
NT-ZTW 5G	1	90				8.3
NT-ZTW 6G	2	110				8.4
NT-ZTW 7G	2	120				8.5

Notes:

1. Above ozone capacity were tested under oxygen source
2. Net weight will be 10% different for different plug.



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Contact person: Wendy He

Email: sales04@gznetech.com

Skype: netech008

Service-Tel: +8613352827882

Fax: (8620) +32032106

Cell /Whatsapp: +86 13826080743

Service-Mail: service@gznetech.com

AIL-Web: <http://netech21v.en.alibaba.com/>

Com-Web: <http://www.ozonegeneratorsupplier.com/>

100mg/hr mini ozone& ion generator

NT-100mg



Features:

1. Health care, create atom of oxygen, improve function of lung protective cilia
2. Expedite metabolism, negative ion can improve human immunity and improves anti-illness capacity
3. Quickly purify the air with decompose the harmful air
4. Remove a myriad of odors from smoke, pets, animals, cooking, mold, mildew, etc
5. Keep air fresher and cleaner for hotel, motel rooms, vehicles, cars, etc
6. Refrigerator sterilization and keep food fresh for longer time
7. Remove hormone and other additives from meat; remove fishy smell, virus from seafood
8. Skin care and facial for women: to clear away pore dirt, bacteria and prevent freckles, etc
9. Ozone output: 100mg/h
10. Small in size, plug & play
11. Cheap price, good quality

Specification:

Input power supply: 110V/60Hz, 220V/50Hz

Power: $\leq 9W$

Output air pressure: 0.01Mpa

Ozone output: 100mg/h

Size: 200×160×60mm

Net weight: 0.65Kg

Setting:

Ozone working 20 mins, then stop 30 mins, then circulation.

Anion working 1 hour, then stop 30mins, then circulation.



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Contact person: Wendy He

Email: sales04@gznetech.com

Skype: netech008

Service-Tel: +8613352827882

Fax: (8620) +32032106

Cell /Whatsapp: +86 13826080743

Service-Mail: service@gznetech.com

AIL-Web: <http://netech21v.en.alibaba.com/>

Com-Web: <http://www.ozonegeneratorsupplier.com/>

CH-JY200MG



| Model

CH-JY200MG

| Ozone production

200mg

| Power input

DC12V

| Power

9.5W

| Outlet diameter

φ6mm

| Dimensions

L155 ×W120 ×H63mm

| Fitting

Adapter

Applies |

- ⊙Home ⊙Gym
- ⊙Hotel ⊙Internet bar
- ⊙Car ⊙Basement
- ⊙KTV ⊙Laundry room
- ⊙Office

| Function

- ⊙Indoor disinfection, inhibit the growth of bacteria
- ⊙ Domestic water purification treatment
- ⊙Decomposition of fruits and vegetables pesticide residue and prolong the storage time.
- ⊙Decomposition of formaldehyde, toluene and other harmful substances.
- ⊙ Decomposition of meat hormones and antibiotic residues.
- ⊙ Remove indoor smoke and other odors.

| Feature

- Domestic patent
- Automatic fault detection
- Portable, movable, easy operation ,easy maintenance
- Good dispersion effect, the ozone gas fully diffuse into air
- High quality glass ozone tube, long use life
- New and fashion design



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Fax: (8620) +32032106

Contact person: Wendy He

Cell /Whatsapp: +86 13826080743

Email: sales04@gznetech.com

Service-Mail: service@gznetech.com

Skype: netech008

Ail-Web: <http://netech21v.en.alibaba.com/>

Service-Tel:+8613352827882

Com-Web: <http://www.ozonegeneratorsupplier.com/>

Wall mounted ozone machine



Applications:

- Cosmetic Factory, Food Factory, Pharmaceutical Factory and all kind of factory.
- Laboratory, Public institution, Library, hotel and other space sterilization

Features:

- Have load capacity and multiple protection function, efficient and stable.
- Use ozone resistance corrosion material. It can use under ozone environment.
- Ozone output stable.
- Stainless steel housing
- Timer setting, automatic control.
- Easy to operate, fashion design, small volume and low noise.
- Input power supply only: 220V/50Hz,110V/60Hz

Specifications

Item	Ozone output	Voltage	Power	New weight	Ozone machine Size	Control box
Model	g/hr	V/HZ	W	Kg	cm	cm
NT-KJB	6	220/50	150	8	38*32*28	20*15*10
NT-KJB	12	220/50	350	16	68*34*28	20*15*10

Noted:

1. Above ozone capacity were tested under oxygen source
2. Net weight will be 10% different for different plug.



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Contact person: Wendy He

Email: sales04@gznetech.com

Skype: netech008

Service-Tel: +8613352827882

Fax: (8620) +32032106

Cell /Whatsapp: +86 13826080743

Service-Mail: service@gznetech.com

Ail-Web: <http://netech21v.en.alibaba.com/>

Com-Web: <http://www.ozonegeneratorsupplier.com/>

2~20G Air Cooling Ozone Machine



Applications:

- 1. Medical treatment industry:** disinfect sickroom, operating room, medical treatment equipment, aseptic room, etc
 - 2. Fruits and vegetables:** keep fruits and vegetables fresh and store them
 - 3. Sea food factory:** Remove smell of sea food factory and kill bacterias ,disinfect production water supply.
 - 4. Slaughtering:** Remove smell of slaughtering and kill bacterias,disinfect production water supply.
 - 5. Poultry factory:** Remove smell of poultry factory and kill bacterias ,disinfect water for poultry feeding.
 6. Commercial use in **House,hotel,Office,KTV,Super Market,Fruit shop** etc.
- Air Purifier:** Remove formaldehyde,benzene compounds,Smoke,Odors,Molds,Bactrias,Virus to fresh air.
Water purifier:Disinfect production Water supply.
- 7. Bottle Water,Domestic Water,Well Water,Pool Water Disinfection & Sterilization**

Control panel:

Voltmeter, Ampmeter, Switch, Timer,
Working light, Power light etc.

Timer: One or Two recycle working time

Features:

1. Built in Domestic Patented Product -Air cooling ceramic ozone generator
2. Built in Automatic air dryer, **Feed dried air or outside oxygen source**
3. Connect with external ozone injector for water treatment
4. It can be Movable with wheels & Handles or Wall mounted.
5. No breakdown with easy operation and maintenance.



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Fax: (8620) +32032106

Contact person: Wendy He

Cell /Whatsapp: +86 13826080743

Email: sales04@gznetech.com

Service-Mail: service@gznetech.com

Skype: netech008

Ail-Web: <http://netech21v.en.alibaba.com/>

Service-Tel:+8613352827882

Com-Web: <http://www.ozonegeneratorsupplier.com/>

NT-KTY-N

Item	Unit	NT-KTY-N 2G	NT-KTY-N 3G	NT-KTY-N 5G	NT-KTY-N 6G
Oxygen flow rate	LPM	0.5~2	1~3	1.2~3	1.5~3.5
Ozone concentration	Mg/L	28~50	28~65	32~60	28~56
Ozone output	G/Hr	1.5~3.0	4~5.0	4.3~5.7	5.0~5.8
Power	W	115	135	160	185
Air flow rate	LPM	40~60			
Compressed air pressure	Mpa	0.025			
Fuse of power supply	A	3			
Size	mm	360×260×610			
Net Weight	kg	11.25		11.30	11.50

NT-T-N

Item	Unit	NT-T-N							
		2G	3G	5G	6G	10G	15G	20G	
Oxygen flow rate	LPM	0.5~2	1~3	1.2~3	1.5~3.5	2.4~6	3.6~9	3~10	
Ozone concentration	Mg/L	28~50	28~65	32~60	28~56	32~60	32~60	38.9~42	
Ozone output	G/Hr	1.5~3.0	4~5.0	4.3~5.7	5.0~5.8	8.6~14.5	13~17	18.6~20	
Power	W	115	135	160	185	260	330	400	
Air flow rate (Suggested)	LPM	40~60				50~75		50~90	
Compressed air pressure	Mpa	0.025							
Fuse of power supply	A	3				5	5	5	
Size	cm	36×26×61				40×30×77			
Net Weight	kg	11.25		11.30	11.50	18	20	35	

Noted: 1. Above ozone capacity were tested under oxygen source

2. Net weight will be 10% different for different plug.



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Contact person: Wendy He

Email: sales04@gznetech.com

Skype: netech008

Service-Tel:+8613352827882

Fax: (8620) +32032106

Cell /Whatsapp: +86 13826080743

Service-Mail: service@gznetech.com

Ail-Web: <http://netech21v.en.alibaba.com/>

Com-Web: <http://www.ozonegeneratorsupplier.com/>

NT-T Series Ozone machine with ORP Monitor

Applications:

1. Aquaculture, Aquarium, Fish farming Water treatment
2. Cooling towers water treatment
3. Swimming pools Water treatment
4. Water Disinfection & sterilization

Features:

1. Built in Domestic Patented Product -Air cooling ceramic ozone generator
2. Built in Automatic air dryer, **Feed dried air or outside oxygen source**
3. ORP Measuring Range: 0~14Ph-1000~+1000mV
4. It can be Movable with wheels & Handles or Wall mounted.
5. Connect with external ozone injector for water treatment
6. **Timer:** One or Two recycle working time
7. No breakdown with easy operation and maintenance.

Control panel:

ORP Monitor, Voltmeter, Ammeter, Switch, Timer,
Working light, Power light etc.

ORP Level:



ORP level(mV)	Application
0-150	No Practical use
150-250	Aquaculture
250-350	Cooling towers
400-475	Swimming pools
450-600	Hot tubs
600	Water Disinfection
800	Water sterilization



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Fax: (8620) +32032106

Contact person: Wendy He

Cell /Whatsapp: +86 13826080743

Email: sales04@gznetech.com

Service-Mail: service@gznetech.com

Skype: netech008

Ail-Web: <http://netech21v.en.alibaba.com/>

Service-Tel: +8613352827882

Com-Web: <http://www.ozonegeneratorsupplier.com/>


Specifications :

Item	Unit	CH-T ORP		
		10G	15G	20G
Oxygen flow rate	LPM	3.5	5	8
Ozone concentration	Mg/L	48.5~52.3	49.5~51.2	38.9~41.7
Ozone output	G/Hr	10~10.9	14.85~15.36	18.6~20.0
Power	W	260	330	400
Fuse	A	5	5	5
Air flow rate	L/Min	50~75	50~75	50~90
Air Compressor pressure	Mpa	0.025		
Net Weight	KG	19	22	24.5
Size	CM	64*46*80	64*46*80	64*46*80

Noted:

1. Above ozone capacity were tested under oxygen source
2. Net weight will be 10% different for different plug.

Installtion

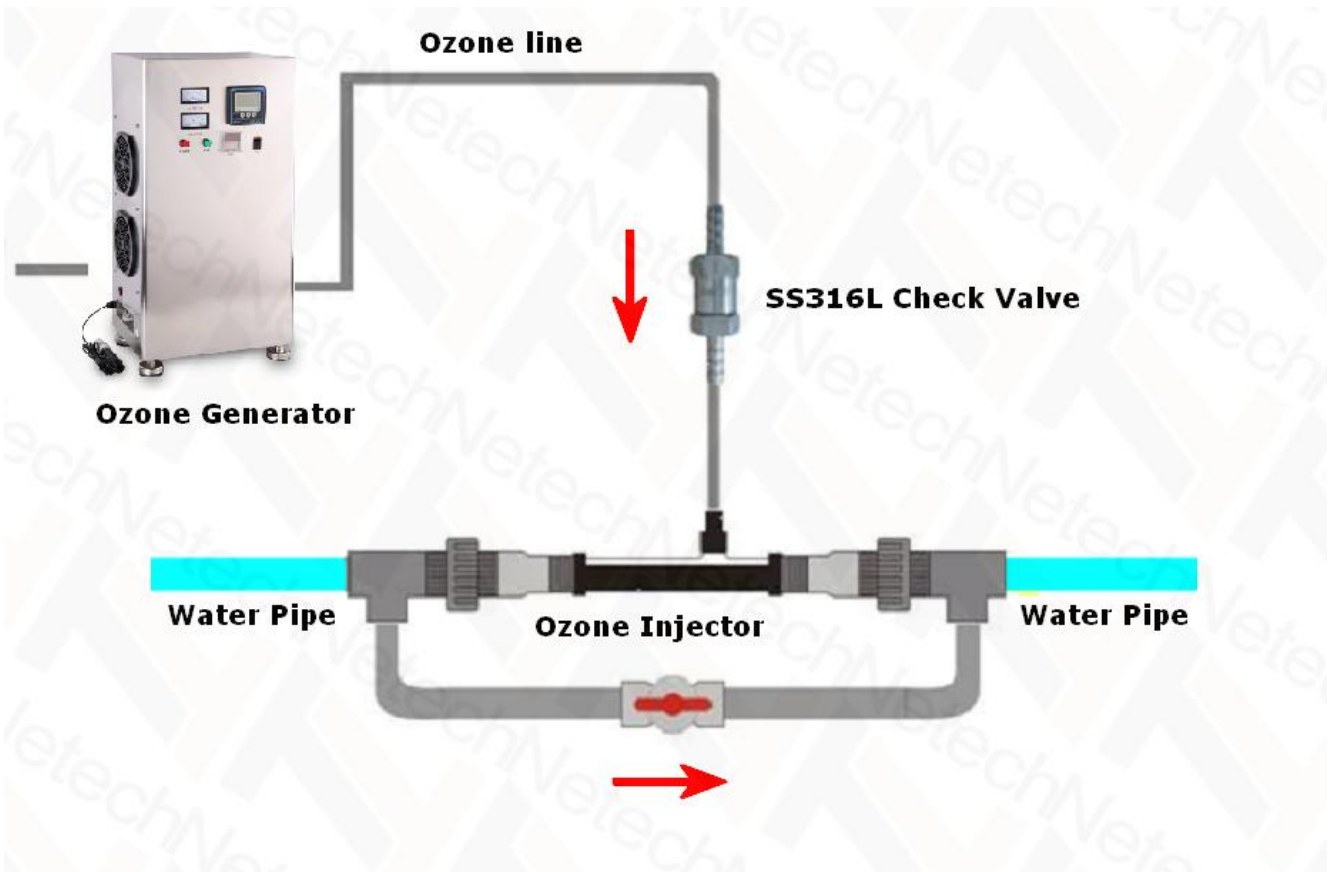



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Contact person: Wendy He

Email: sales04@gznetech.com

Skype: netech008

Service-Tel: +8613352827882

Fax: (8620) +32032106

Cell /Whatsapp: +86 13826080743

Service-Mail: service@gznetech.com

Ail-Web: <http://netech21v.en.alibaba.com/>

Com-Web: <http://www.ozonegeneratorsupplier.com/>

10~50g/h Water Cooling Feed Outside Oxygen Source

Ozone Generator NT-WZQ



Applications:

Drinking water treatment, Spring water treatment ozone generator, Vegetable and fruits wash machine, Chemical oxidation, Decolor and bleach ozone machine, Mariculture equipment, Mariculture ozone generator, Aquaculture water sterilization ozone generator, Aquaculture equipment, Remove alga equipment, Aquaculture ozone generator, Aquaculture recycle water treatment equipment, Raw water aquaculture equipment, Connect with outside gas feeding ozone generator, Nursery aquaculture equipment

Features:

1. SS housing /carbon steel sprayed with plastic housing
2. It must connect with outside oxygen generator or oxygen tank
3. With built-in water cooling enamel ozone tube, high frequency electric board, thus max ozone concentration: 100Mg/L with stable ozone capacity, long life time
4. Small in size, adjustable ozone range: 20%--100%
5. Use with over current, over voltage, water protection device, for ensuring ozone machine running safety

Control panel:

Ozone output adjuster, Flow meter , Pressure regulator, Voltmeter, Ampmeter, Switch, Emergency stop, Working light, Power light, Alarm



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Fax: (8620) +32032106

Contact person: Wendy He

Cell /Whatsapp: +86 13826080743

Email: sales04@gznetech.com

Service-Mail: service@gznetech.com

Skype: netech008

AIL-Web: <http://netech21v.en.alibaba.com/>

Service-Tel: +8613352827882

Com-Web: <http://www.ozonegeneratorsupplier.com/>

NT-WZQ

Specifications :

Item	Unit	NT-WZQ				
		10G	20G	30G	40G	50G
Oxygen flow rate	LPM	1~3	2~7	3~10	5~10	8~18
Ozone concentration	Mg/L	69~88	52~104	56~93	85~116	60~90
Ozone output	G/Hr	5~12	12~22	16~33	34~51	43~64
Power	W	220	250	400	510	1300
Fuse	A	3	3	3	5	6
Cooling water flow rate	LPM	30			48	
Size	mm	460×390×840				



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Contact person: Wendy He

Email: sales04@gznetech.com

Skype: netech008

Service-Tel: +8613352827882

Fax: (8620) +32032106

Cell /Whatsapp: +86 13826080743

Service-Mail: service@gznetech.com

Ail-Web: <http://netech21v.en.alibaba.com/>

Com-Web: <http://www.ozonegeneratorsupplier.com/>

High-concentration ozone dissolved water machine



NT-WCZ-2, this system can produce **OZONE WATER** 1800~2400liter per hour, and it can controls output of ozone dissolved water with concentration from **4mg/l to 15mg/l**.

Control panel:

Amp meter, Voltmeter, Timer, Emergency stop, working light, Power light, Trouble Alarm, Working light, Start light, Stop light

Applications:

Medical treatment industry

It can be used to disinfect medical apparatus and instruments and treatment of disease.

Food processing factory

It can be used to clean pipeline, production equipment and vessel during Food processing factory; wash fruits & vegetables to remove mold and bacteria; wash meat and poultry to remove bacteria and extend refrigerated shelf life.

Pharmaceutical factory

It can be used to clean pipeline, production equipment and vessel during pharmaceutical factory.

Beverage industry

It can be used to disinfect production water supply for pure water, mineral water and any kinds of beverage, etc.

Hotel, Dining Hall, Restaurant etc.

It can be widely used in hotel, dining hall, restaurant, etc in order to disinfect tableware, vegetables, fruits, toy for children and surface of other objects.

Sea food factory



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Contact person: Wendy He

Email: sales04@gznetech.com

Skype: netech008

Service-Tel: +8613352827882

Fax: (8620) +32032106

Cell /Whatsapp: +86 13826080743

Service-Mail: service@gznetech.com

AIL-Web: <http://netech21v.en.alibaba.com/>

Com-Web: <http://www.ozonegeneratorsupplier.com/>

It can be used to make Ozonated Ice to pack fresh fish and seafood to prolong freshness; remove smell of sea food factory and kill bacteria; Disinfect production water supply

Slaughtering

It can be used to remove smell of slaughtering and kill bacteria and disinfect production water supply.

Poultry factory

It can be used for removing smell of poultry factory and kill bacteria, disinfecting water for poultry feeding.

Swimming pool and SPA

It can be used for pool or spa water sterilization and disinfection.

Sewerage water treatment

It can be used for effectively destroy bacteria and in the processing of water laden with concentrations of industrial byproducts.

Aquaculture and aquarium water sterilization

it can be used to achieve water quality improvements by micro flocculating fine particulate matter (making particles that are easier to settle or filter) and oxidizing non biodegradable organic molecules (creating smaller and more biodegradable molecules), nitrite, and refractory organic molecules (reducing water color) in Fresh water & Seafood cultivating factory; Fresh water & Seawater hatcheries; Ocean polis, aquarium, aquaculture, fishing farm.

Ozone laundry system for Washing machine

it can be used to reduce all bacteria and viruses that may be on any linens, wiping cloths, or clothing; reduce the cross contamination of illness in nursing home and hospital facilities

Configuration:

High pure ceramic ozone tube:	Long use life, high ozone concentration, low temperature, continuous working
High frequency and high pressure ozone power board:	Adjustable frequency, adjustable width and audible alarm. It will not damage the power board if circuit break or short circuit.
Oil free air compressor:	Offer clean air source
Air dryer:	Offer clean and dry air source
PSA high pure oxygen sieve:	Offer oxygen purity:93%
Stainless steel high efficiency gas liquid mixing pump:	The pump sucks the liquid and air, then mix them. The micro air bubble of gas-liquid dissolving effect is good
Stainless steel high efficiency static mixer:	Improve dissolved effect is more than three times
Stainless steel anti water return equipment:	It can prevent water return back to machine
Water level sensor:	Prevent the equipment running without water or lack of water
Alarm device:	Humanized remind users equipment anomalies



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Contact person: Wendy He

Email: sales04@gznetech.com

Skype: netech008

Service-Tel:+8613352827882

Fax: (8620) +32032106

Cell /Whatsapp: +86 13826080743

Service-Mail: service@gznetech.com

Ail-Web: <http://netech21v.en.alibaba.com/>

Com-Web: <http://www.ozonegeneratorsupplier.com/>

Specification:

Item	Unit	Model
		CH-WCZ-2
Working Voltage	V/HZ	220V/50/60HZ
Operating Power	W	1800W
Dissolved ozone concentration in water	PPM	4-15
Rated Water flow	L/hr	1800~2400Liliter per hour
Ambient temperature	°C	3-40°C
Ambient Humidity	%	≤70%
Mixing pressure	Mpa	0.25-0.4Mpa
Water Output Pressure	Mpa	0.05-0.2Mpa
Diameter of input water pipe	inch	1"
Diameter of output water pipe	inch	3\4"
Weight	KG	113
Dimension	mm	750×450×1300mm

Noted: Net weight will be 10% different for different plug



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Contact person: Wendy He

Email: sales04@gznetech.com

Skype: netech008

Service-Tel: +8613352827882

Fax: (8620) +32032106

Cell /Whatsapp: +86 13826080743

Service-Mail: service@gznetech.com

Ail-Web: <http://netech21v.en.alibaba.com/>

Com-Web: <http://www.ozonegeneratorsupplier.com/>

NT-YFC series Air Cooling Complete Ozone Machine



Features:

1. Carbon steel sprayed with plastic housing;
2. Built-in PSA high purity **twelve tower oxygen sieve**;
3. Built-in patent of product –**Air cooling Ceramic ozone tube** with high frequency electric board, high ozone concentration and stable ozone capacity, long life time;
4. Built-in **Oil-free air compressor**;
5. Built-in **Air dryer and filters**. To supply cool, dry, clean air source for air compressor and PSA oxygen concentrator;
6. **Manual control**, easy operation and maintenance.

Control panel:

Voltmeter, Amp meter, Timer, Ozone Amp meter, Main switch, Power supply switch, Emergency stop, working light, Power light, Alarm

Control protection:

Over current protection
Electric leakage protection
Short circuit protection
Over heat of air compressor protection
Time delay system protection



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Contact person: Wendy He

Email: sales04@gznetech.com

Skype: netech008

Service-Tel: +8613352827882

Fax: (8620) +32032106

Cell /Whatsapp: +86 13826080743

Service-Mail: service@gznetech.com

Ail-Web: <http://netech21v.en.alibaba.com/>

Com-Web: <http://www.ozonegeneratorsupplier.com/>

Application

1. Medical treatment industry: disinfect sickroom, operating room, medical treatment equipment, aseptic room, etc;
2. Laboratory: industrial oxidation of flavor and pharmaceutical intermediate;
3. Food processing industry: keep fruits and vegetables fresh and cold storage; rice & wheat storage; or storage room air sterilization.
4. Sea food factory: Remove smell of sea food factory and kill bacteria;
5. Slaughtering: Remove smell of slaughtering and kill bacteria;
6. Poultry factory: Remove smell of poultry factory and kill bacteria;
7. Green house: air sterilization and kill bacteria.
8. Agricultural: fish farm water treatment
9. Swimming pool water treatment
10. Drinking water treatment

Specifications :

Item	Unit	NT-YFC5G	NT-YFC10G	NT-YFC15G	NT-YFC20G	NT-YFC30G
Oxygen flow rate	LPM	3	3.5	5	8	10
Ozone concentration	Mg/L	48.5~52.3	48.5~52.3	49.5~51.2	38.9~41.7	53.2~56.1
Ozone output	G/Hr	5	10~11	14.8~15.4	18.6~20	32~34
Power	KW	≤0.48	≤0.81	≤0.924	≤1.00	≤1.23
Current	A	2.2	3.6	4.2	4.5~4.7	5.6±5%
Voltage	V	220V/50HZ				
NW	KG	64	86	89	92	97
Size	cm	45x50x84	50×66×95			45*93*118

Noted:

1. Above ozone capacity were tested under oxygen source
2. Net weight will be 10% different for different plug



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Contact person: Wendy He

Email: sales04@gznetech.com

Skype: netech008

Service-Tel: +8613352827882

Fax: (8620) +32032106

Cell /Whatsapp: +86 13826080743

Service-Mail: service@gznetech.com

Ail-Web: <http://netech21v.en.alibaba.com/>

Com-Web: <http://www.ozonegeneratorsupplier.com/>

NT-Y Series Water Cooling Complete Ozone Generator



40g ~100G

Features:

1. With built-in oxygen system, carbon steel sprayed with plastic or SS housing complete ozone generator
2. With built-in water cooling enamel ozone tube, high frequency electric board, thus max ozone concentration: 100Mg/L with stable ozone capacity, long life time
3. Adjustable ozone range: 20%--100%, it can working automatic
4. Compact assembly, Movable with Wheels
5. Use with over current, over voltage, water protection device, for ensuring ozone machine running safety

Control panel:

Ozone output adjuster, Voltmeter, Ammeter, Timer, Cooling water temperature indicator, Ozone Ampmeter, Main switch, Power supply switch, Emergency stop, Working light, Power light, Alarm

Specifications and Price

Item	Unit	NT-Y40G	NT-Y50G	NT-Y100G
Oxygen flow rate	LPM	5~15	8~18	16-32
Ozone concentration	Mg/L	90~56	90~60	90~58
Ozone output	G/Hr	27~50	43~64	86~111
Power	Kw	≤1.62	≤1.85	3.5
Fuse	A	15	20	20
Cooling water flow	LPM	48		
Size	mm	650×1030×1230		650×1030×1230

Noted:

1. Above ozone capacity were tested under oxygen source
2. Net weight will be 10% different for different plug



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Contact person: Wendy He

Email: sales04@gznetech.com

Skype: netech008

Service-Tel: +8613352827882

Fax: (8620) +32032106

Cell /Whatsapp: +86 13826080743

Service-Mail: service@gznetech.com

Ail-Web: <http://netech21v.en.alibaba.com/>

Com-Web: <http://www.ozonegeneratorsupplier.com/>

Air cooling Ceramic Ozone Tube

Imported material of high pure ceramic, SS 316L of internal electrode, teflon connections which are best anti-oxidation material for ensuring several years running.

Features:

1. Extremely low rate of ozone decay & high ozone concentration.

Ozone concentration can be around.30~86 Mg/L, which is much higher than conventional products.

2. Domestic patent product-got domestic patent in 2008.

Air cooled for internal & external electrodes with low temperature rise of continuously working, high efficiency and stable ozone output.

3. Low working voltage

The working voltage is only 10% of the similar products, stable capacity but with low ozone dissipated.

4. Small in size.

It saves space effectively. The size is 1/4 smaller than similar products.

5. Easy to maintain and install





Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Fax: (8620) +32032106

Contact person: Wendy He

Cell /Whatsapp: +86 13826080743

Email: sales04@gznetech.com

Service-Mail: service@gznetech.com

Skype: netech008

Ail-Web: <http://netech21v.en.alibaba.com/>

Service-Tel:+8613352827882

Com-Web: <http://www.ozonegeneratorsupplier.com/>

CH-PTF1G ~3G

Item	Unit	CH-PTF				
		1G (12V)	1G (220V)	1G (110V)	3GM	3GA
Ambient temperature	°C	21.6	25	23.6	21	
Ambient humidity	%	40	50	21.6	40	
Power	W	≤14.4	≤15	≤15	≤50	≤80
Oxygen feed flow rate	LPM	0.3~0.5	0.3~1	0.3~1	0.5-1	
Ozone concentration	Mg/L	49~40	49~30	49~30	81.6-49.2	
Ozone output	G/Hr	0.88~1.2	0.88~1.8		2.4-2.95	
Ozone output adjustable range	%	/			/	20~100
Line power supply	V/Hz	110/60 220/50				
Cooling way	/	Air cooling				
Diameter of cooling fan	mm	50*50	50*50	50*50	120	
Diameter of gas inlet/outlet	mm	EDΦ6				
Power supply dimensions	mm	105*57*50	96*47*32	96*47*32	153×60×53	201×86×83
ozone tube dimensions	mm	125*50*50			165×90*90	
Ozone tube weight	Kg	0.2			0.5	
Power supply weight	Kg	0.15			0.59	0.76



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Fax: (8620) +32032106

Contact person: Wendy He

Cell /Whatsapp: +86 13826080743

Email: sales04@gznetech.com

Service-Mail: service@gznetech.com

Skype: netech008

Ail-Web: <http://netech21v.en.alibaba.com/>

Service-Tel:+8613352827882

Com-Web: <http://www.ozonegeneratorsupplier.com/>

CH-PTF5G ~7G

Item	Unit	CH-PTF				
		5GM	5GA	6GM	6GA	7GA
Ambient temperature	℃	21	21	26		26
Ambient humidity	%	40		49		49
Power	W	≤65	≤80	≤80	≤85	≤95
Oxygen feed flow rate	LPM	0.5-2		1~3		1~3
Ozone concentration	Mg/L	72~48		64.6~36.7		70~41.2
Ozone output	G/Hr	2.16~4.76		3.9~6.6		4.20~7.4
Ozone output adjustable range	%	/	20~100	/	20~100	20~100
Line power supply	V/Hz	110/60 220/50				
Cooling way	/	Air cooling				
Diameter of cooling fan	mm	150				
Diameter of gas inlet/outlet	mm	EDΦ6				
Power supply dimensions	mm	177*66*53	201*86*83	177*66*53	201*86*83	201*86*83
ozone tube dimensions	mm	185*90*90		200*90*90		212*90*90
Ozone tube weight	Kg	0.53		0.56		0.65
Power supply weight	Kg	0.59	0.76	0.59	0.76	1.1



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Contact person: Wendy He

Email: sales04@gznetech.com

Skype: netech008

Service-Tel: +8613352827882

Fax: (8620) +32032106

Cell /Whatsapp: +86 13826080743

Service-Mail: service@gznetech.com

Ail-Web: <http://netech21v.en.alibaba.com/>

Com-Web: <http://www.ozonegeneratorsupplier.com/>

Air & Water cooling Ceramic Ozone Tube

Imported material of high pure ceramic, SS 316L of internal electrode, teflon connections which are best anti-oxidation material for ensuring several years running.

Features:

1. Extremely low rate of ozone decay & high ozone concentration.

Ozone concentration is around 40~70 mg/L, which is much higher than conventional products.

2. Domestic patent product -- got domestic patent in 2008.

A The internal electrode cooled by water, external electrode cooled by air (fan).

B The aluminum plate looks like sun flower which has larger cooling area, easy for heat dissipation.

C High technology—the thickness of ceramic tube is only 1.70 mm.

3. Low working voltage

The working voltage is only 10% of the similar products, stable capacity but with low ozone dissipated.

4. Small in size.

It is 1/4 smaller than similar products with same capacity.

5. Easy to maintain and install





Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Fax: (8620) +32032106

Contact person: Wendy He

Cell /Whatsapp: +86 13826080743

Email: sales04@gznetech.com

Service-Mail: service@gznetech.com

Skype: netech008

Ail-Web: <http://netech21v.en.alibaba.com/>

Service-Tel:+8613352827882

Com-Web: <http://www.ozonegeneratorsupplier.com/>

CH-PT 7-50G/Hr

Item	Unit	CH-PT				
		7GM	7GA	15GA	30GA	50GA
Ambient temperature	°C	28		21.9	22	26
Ambient humidity	%	37		39	38	44
Oxygen feed flow rate	LPM	1~3		3~5	7~9	15~18
Ozone concentration	Mg/L	70-40		66.4~53	62~53	52~49
Ozone output	G/Hr	4.2~7.2		11.9~15.9	26~28.6	46.8~52.9
Power (220V)	W	≤100	≤100	≤190	≤300	≤500
Current +_10%	A	0.45		0.86	1.4	1.9
Cooling way		Air cooling for external electrode,water cooling for internal electrode				
Cooling water flow rate	LPM	>2				
Diameter of cooling water pipe	mm	EDΦ10				
Temperature of cooling water	°C	Ambient temperature ±8°C				
Diameter of cooling fan	mm	1pcs Dia.150 fan				2pcs Dia.150 fan
Diameter of Gas inlet/outlet	mm	EDΦ6	EDΦ6	EDΦ6	EDΦ8	EDΦ8
Ozone output adjust range	%	/	20-100	20-100		
Line power supply	V/Hz	110/60 220/50				
Ozone tube dimensions	mm	200×100×105		260×100×105	300×140×150	325×140×150
Power supply dimensions	mm	177×66×53	201×86×83	125×100×95	210×146×60	210×146×60
weight of power supply	KG	0.73	0.66	1.0	0.62+2	0.62+2
weight of ozone tube	KG	1.12		1.38	3.76	4.2



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Contact person: Wendy He

Email: sales04@gznetech.com

Skype: netech008

Service-Tel: +8613352827882

Fax: (8620) +32032106


Cell /Whatsapp: +86 13826080743

Service-Mail: service@gznetech.com

Ali-Web: <http://netech21v.en.alibaba.com/>

Com-Web: <http://www.ozonegeneratorsupplier.com/>

Water cooling Enamel Ozone Tube

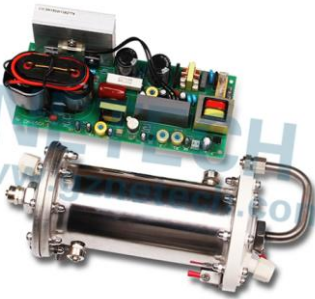


CH-PC18G



CH-PC30G



CH-PC40G

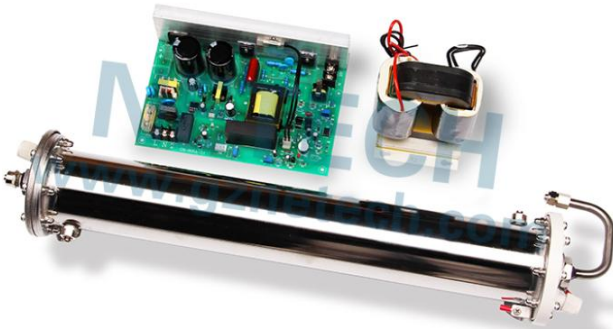

CH-PC60G



CH-PC80G

1. Electrodes:

Use enamel coating as internal electrode, stainless steel as external electrode, capacity of corona resistance and machinery anti-force capacity are stronger than glass, ceramic material. Uniformity air gap between enamel coating internal electrode and stainless steel external electrode, it produces high concentration ozone output. It uses insulation materials for connections, for preventing creepage.

2. Cooling way

Water cooled for internal & external electrodes, effective prevent high temperature rising when the tube is discharging, for ensuring high ozone concentration output.

3. Adjustable ozone output: 20-100%.

Use high-frequency & Intelligent power supply inverse system, ozone output can be changed on demand to achieve accuracy control.

4. High ozone concentration & output



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Fax: (8620) +32032106

Contact person: Wendy He

Cell /Whatsapp: +86 13826080743

Email: sales04@gznetech.com

Service-Mail: service@gznetech.com

Skype: netech008

Ail-Web: <http://netech21v.en.alibaba.com/>

Service-Tel:+8613352827882

Com-Web: <http://www.ozonegeneratorsupplier.com/>

CH-PC 18-80G/Hr

Item	Unit	CH-PC18G	CH-PC30G	CH-PC40G	CH-PC60G	CH-PC80G
Ambient temperature	℃	23	23	23.9	23.9	24
Ambient humidity	%	38	38	37		
Oxygen flow rate	LPM	1~4	2~8	3~10	5~17	8~20
Ozone concentration	Mg/L	112~78	123~72	123~70	120-72	118-74
Ozone output	G/Hr	6.7-18.7	14.8~34.6	22.1-42	36-73	56-88
Power	Kw	≤0.22	≤0.3	≤0.4	≤0.6	≤0.8
Cooling method	Water cooling for internal & external electrodes					
Cooling water flow rate	LPM	≥2				
Cooling water temperature	℃	ambient temperature ± 8℃				
Diameter of gas inlet/outlet	mm	1.Air inlet & ozone outlet: EDφ8mm				
Diameter of water inlet/outlet		EDφ10mm				
Adjustable range	%	20-100				
Power supply	V/Hz	110/220V 60/50HZ				
Fuse	A	3	5	10		
Ozone tube dimension	mm	285*160*125	340*160*12 5	460*160*12 5	600*160*12 5	705*160*12 5
Power supply dimension	mm	212*90*95	189*146*95		210*146*62	
Ozone tube weight	Kg	2.5	3	3.6	4.9	5.45
Power supply weight	Kg	1			2.4	



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Contact person: Wendy He

Email: sales04@gznetech.com

Skype: netech008

Service-Tel: +8613352827882

Fax: (8620) +32032106

Cell /Whatsapp: +86 13826080743

Service-Mail: service@gznetech.com

Ail-Web: <http://netech21v.en.alibaba.com/>

Com-Web: <http://www.ozonegeneratorsupplier.com/>

Venturi

Marks	Model	Quantity (PC)	Size (mm)	Water flow rate(T/Hr)	
1	A12057	1	57	0.05-0.25	
2	A25100	1	100	0.1-1	
3	A32235	1	235	3-10	
4	A25152	1	152	1~3	
5	A48275	1	275	10~25	
6	A58295	1	295	25~50	

Venturi is designed to be used with an ozone generator for water treatment. It is made of anti-ozone material, PVDF. Connected to your existing filtration system it allows an ozone injection point, where the vacuum effectively sucking the ozone gases into the water flow

Specifications

<p>Model: A12057 Material: PVDF Water flow rate: 0.05-0.25 T/Hr Specification: 1. Inlet & Outlet diameter 1/5" external screw thread 2. Valve bonnet of Gas Inlet is 1/8"; 3. flexible hose is 1/4" 4. Length: 57 mm</p>	<p>Model: A25100 Material: PVDF Water flow rate: 0.1-1 T/Hr Specification: 1. Inlet & Outlet diameter 1/2" external screw thread 2. Valve bonnet of Gas Inlet is 1/4"; 3. flexible hose is 1/4" 4. Length: 100 mm</p>	<p>Model : A32235 Material: PVDF Water flow rate: 3-10 T/Hr Specification: 1. Inlet & Outlet diameter 1" external screw thread. 2. Valve bonnet of Gas Inlet is 1/2"; 3. flexible hose is 1/8" 4. Length: 230 mm</p>
<p>Model: A25152 Material: PVDF Water flow rate: 1~3 T/Hr Specification: 1. Inlet & Outlet diameter 3/4" external screw thread 2. Valve bonnet of Gas Inlet is 1/4"; 3. flexible hose is 1/4" 4. Length: 152 mm</p>	<p>Model: A48275 Material: PVDF Water flow rate: 10~25 T/Hr Specification: 1. Inlet & Outlet diameter 1.5" screw thread 2. Valve bonnet of Gas Inlet is 1/2"; 3. flexible hose is 1/2" 4. Length: 275mm</p>	<p>Model: A58295 Material: PVDF Water flow rate: 25~50T/Hr Specification: 1. Inlet & Outlet diameter 2" screw thread 2. Valve bonnet of Gas Inlet is 1.25"; 3. flexible hose is 1/2" 4. Length: 295mm</p>



Guangzhou Netech Environmental Technology Co., Ltd

Add: Room 108, No.18 Mubei West Street, Tianhe District, Guangzhou China

Tel: (8620) +38246009

Fax: (8620) +32032106

Contact person: Wendy He

Cell /Whatsapp: +86 13826080743

Email: sales04@gznetech.com

Service-Mail: service@gznetech.com

Skype: netech008

Ail-Web: <http://netech21v.en.alibaba.com/>

Service-Tel:+8613352827882

Com-Web: <http://www.ozonegeneratorsupplier.com/>

O2 & O3 for Air/Water Treatment



Air / water cooling O3 tube (1g/h— 80g/h)	2 / 12 O2 towers parts (3LPM—15LPM)	Portable O3 Generator (3G, 5G, 6G,7G/Hr)	Air source/oxygen source O3 Generator (3G, 5G, 10G, 20G, 50G,100G.....2KG/Hr)	
 <p>Air cooling (NT-PTF) Water cooling (NT-PT) (NT-PC)</p>			 	
<p>Material: Ceramic/Enamel ozone tube Cooling method: Air/Water O3 output: 1G 15G ... 60G 80G O3 concentration: 28Mg/L—120Mg/L</p>	<p>Material: Zeolite/Lithium Type: 2/12 towers O2 output: 3L 5L 7.5L 8L 10LPM O2 concentration: 90%±3%</p>	<p>Model: NT-KTA/KTB/BT/BP/KTM/DP O3 output: 3G 5G 6G 7G/Hr Applications: Water/Air sterilization, purification, healthy...</p>	<p>Model: NT-ZTW/T/WZQ/YFC... O3 output: 2G 10G 50G...100g/Hr Applications: Medical, Water Air sterilization, purification...</p>	
Home/Industrial O2 Machine (3LPM...40LPM)	O3 System for Pool Water	Aquaculture Equipment		Other Parts
				
<p>Model:NT-OM3L/5L/10L,NT010LC...040LC O2 output: 3L 5L 10L 30L...40LPM Applications:Home,Aquaculture....</p>	<p>Equipment: Ozone generator, Booster pump, UV tank ,Venturi,Check valve... Pool size: 30—600—2500CBM..</p>	<p>Equipments: Drum filter/Sand filter, Protein skimmer, Ozone generator, Oxygen generator, Biological filter, UV sterilizer .. Applications: Sea /Fresh water treatment..</p>		<p>Products: Mixing pump,mixing tank,SS venturi,anti water equipment,check valve,ozone tester,air/oxygen flow meter.....</p>